


O-ring Mechanical Parts Series

LYRO-C

- **Operational Conditions:**
 Temperature: -20℃ to +180℃
 Pressure: ≤ 1.0MPa
 Speed: ≤ 15m/s
- **Materials:**
 Stationary Ring: B
 Rotary Ring: F,U2
 Secondary Seal: P,E,V,T
 Spring and Metal Parts: F,G
- **Applications:** Clean water, sewage water,
 Oil and other moderately corrosive fluids.

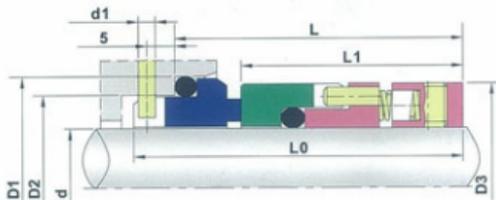

规格/Size (公制/Metric)	D3	D2	D1	d1	L0	L	L1
20	34	29	35	3	51	44	31
22	36	31	37	3	51	44	31
24	38	33	39	3	51	44	31
25	39	34	40	3	51	44	31
28	42	37	43	3	53	46	33
30	44	39	45	3	53	46	33
32	46	42	48	3	56	49	36
33	47	42	48	3	56	49	36
35	49	44	50	3	56	49	36
38	54	49	58	4	62	55	40
40	56	51	58	4	62	55	40
43	59	54	61	4	64	57	42
45	61	56	63	4	64	57	42
48	64	59	66	4	64	57	42
50	66	62	70	4	65	58	42
53	69	65	73	4	65	58	42
55	71	67	75	4	65	58	42
58	78	70	78	4	68	59	43
60	80	72	80	4	68	59	43
63	83	75	83	4	68	59	43
65	85	77	85	4	68	59	43
68	88	81	90	4	68	61	43
70	90	83	92	4	69	62	44
75	99	88	97	4	69	62	44
80	104	95	105	4	74	67	49
85	109	100	110	4	74	67	49
90	114	105	115	4	74	67	49
95	119	110	120	4	74	67	49
100	124	115	125	4	74	67	49
105	129	120	130	4	74	67	49
110	138	125	136	4	74	67	49
115	143	130	141	4	74	67	49
120	148	135	146	4	74	67	49